

NAR IVHS

Integrated Vehicle Harness System




Instructions for Use



1. Lay horizontal portion of integrated harness on the top of body armor at desired level.



2. Remove the tri-glide nylon loop from one end of the vertical portion.

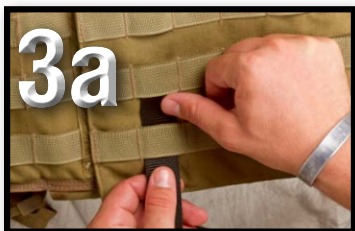

3. Route underneath the MOLLE on the body armor (loop should be spaced to fit into the horizontal portion, as shown)



4. Once the loop is in the armor at the desired length reattach the buckle, as shown.



5. Tighten horizontal portion of integrated harness.



6. Placement of the Quick Release Shackle: Before putting on belt. Determine which side of the belt the Quick Release Shackle needs to be placed on. Upon determination, disengage rear snap of leg loop where it meets belt. Slide Quick release shackle to appropriate position, and re-engage snap onto belt.

continued

NAR IVHS

Integrated Vehicle Harness System



Instructions Continued



7. Starting with all straps loose, step into the leg loops. Bring belt portion up to waist level (ensure buckle is in the front of the body).



8. Feed each side of the buckle through bottom portion of the integrated harness, and buckle belt.



9. Tighten belt by pulling the tightening strap until a comfortable fit is achieved, and tighten leg loops until they also fit comfortably.



10. Secure all loose straps in the elastic retainers. Clip harness to a hardpoint in the vehicle by the attachment point on the Harness.



NORTH AMERICAN RESCUE
www.NARescue.com • 888.689.6277

PRODUCTS WITH A
MISSION[®]

REV042116